




# LED BULB



Technical Drawing




Photometric Diagram

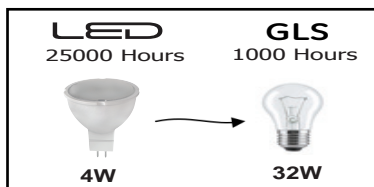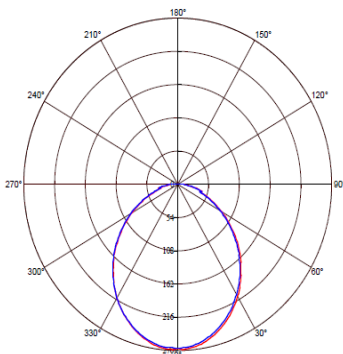

Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	4
Equivalence with incandescent lamp	32
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium Housing with PMMA Diffuser
Protection Class	-
Dimmable	No
EEL	A+
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	250
Luminous Efficacy (lm/W)	62.5
Rated Life (hrs) Ⓣ	25,000
IP Rating	-
Power Factor	>0.4
Beam Angle ∆	105 °
Starting Time	<0.5
Number of ON-OFF cycling	x12,500

## Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



## Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

12.500X ON / OFF	Start Up Time <0.5
NO UV / IR	25000h Lifetime
0,0mg Hg	Optimally
12.500X ON / OFF	Start Up Time <0.5
NO UV / IR	25000h Lifetime
0,0mg Hg	Optimally
105°	-10°C 40°C
Ra >80	Warm Up %60 < 0.5 sc.
PF >0.4 Power Factor	

